


HWLAB[®] Micropipette U model

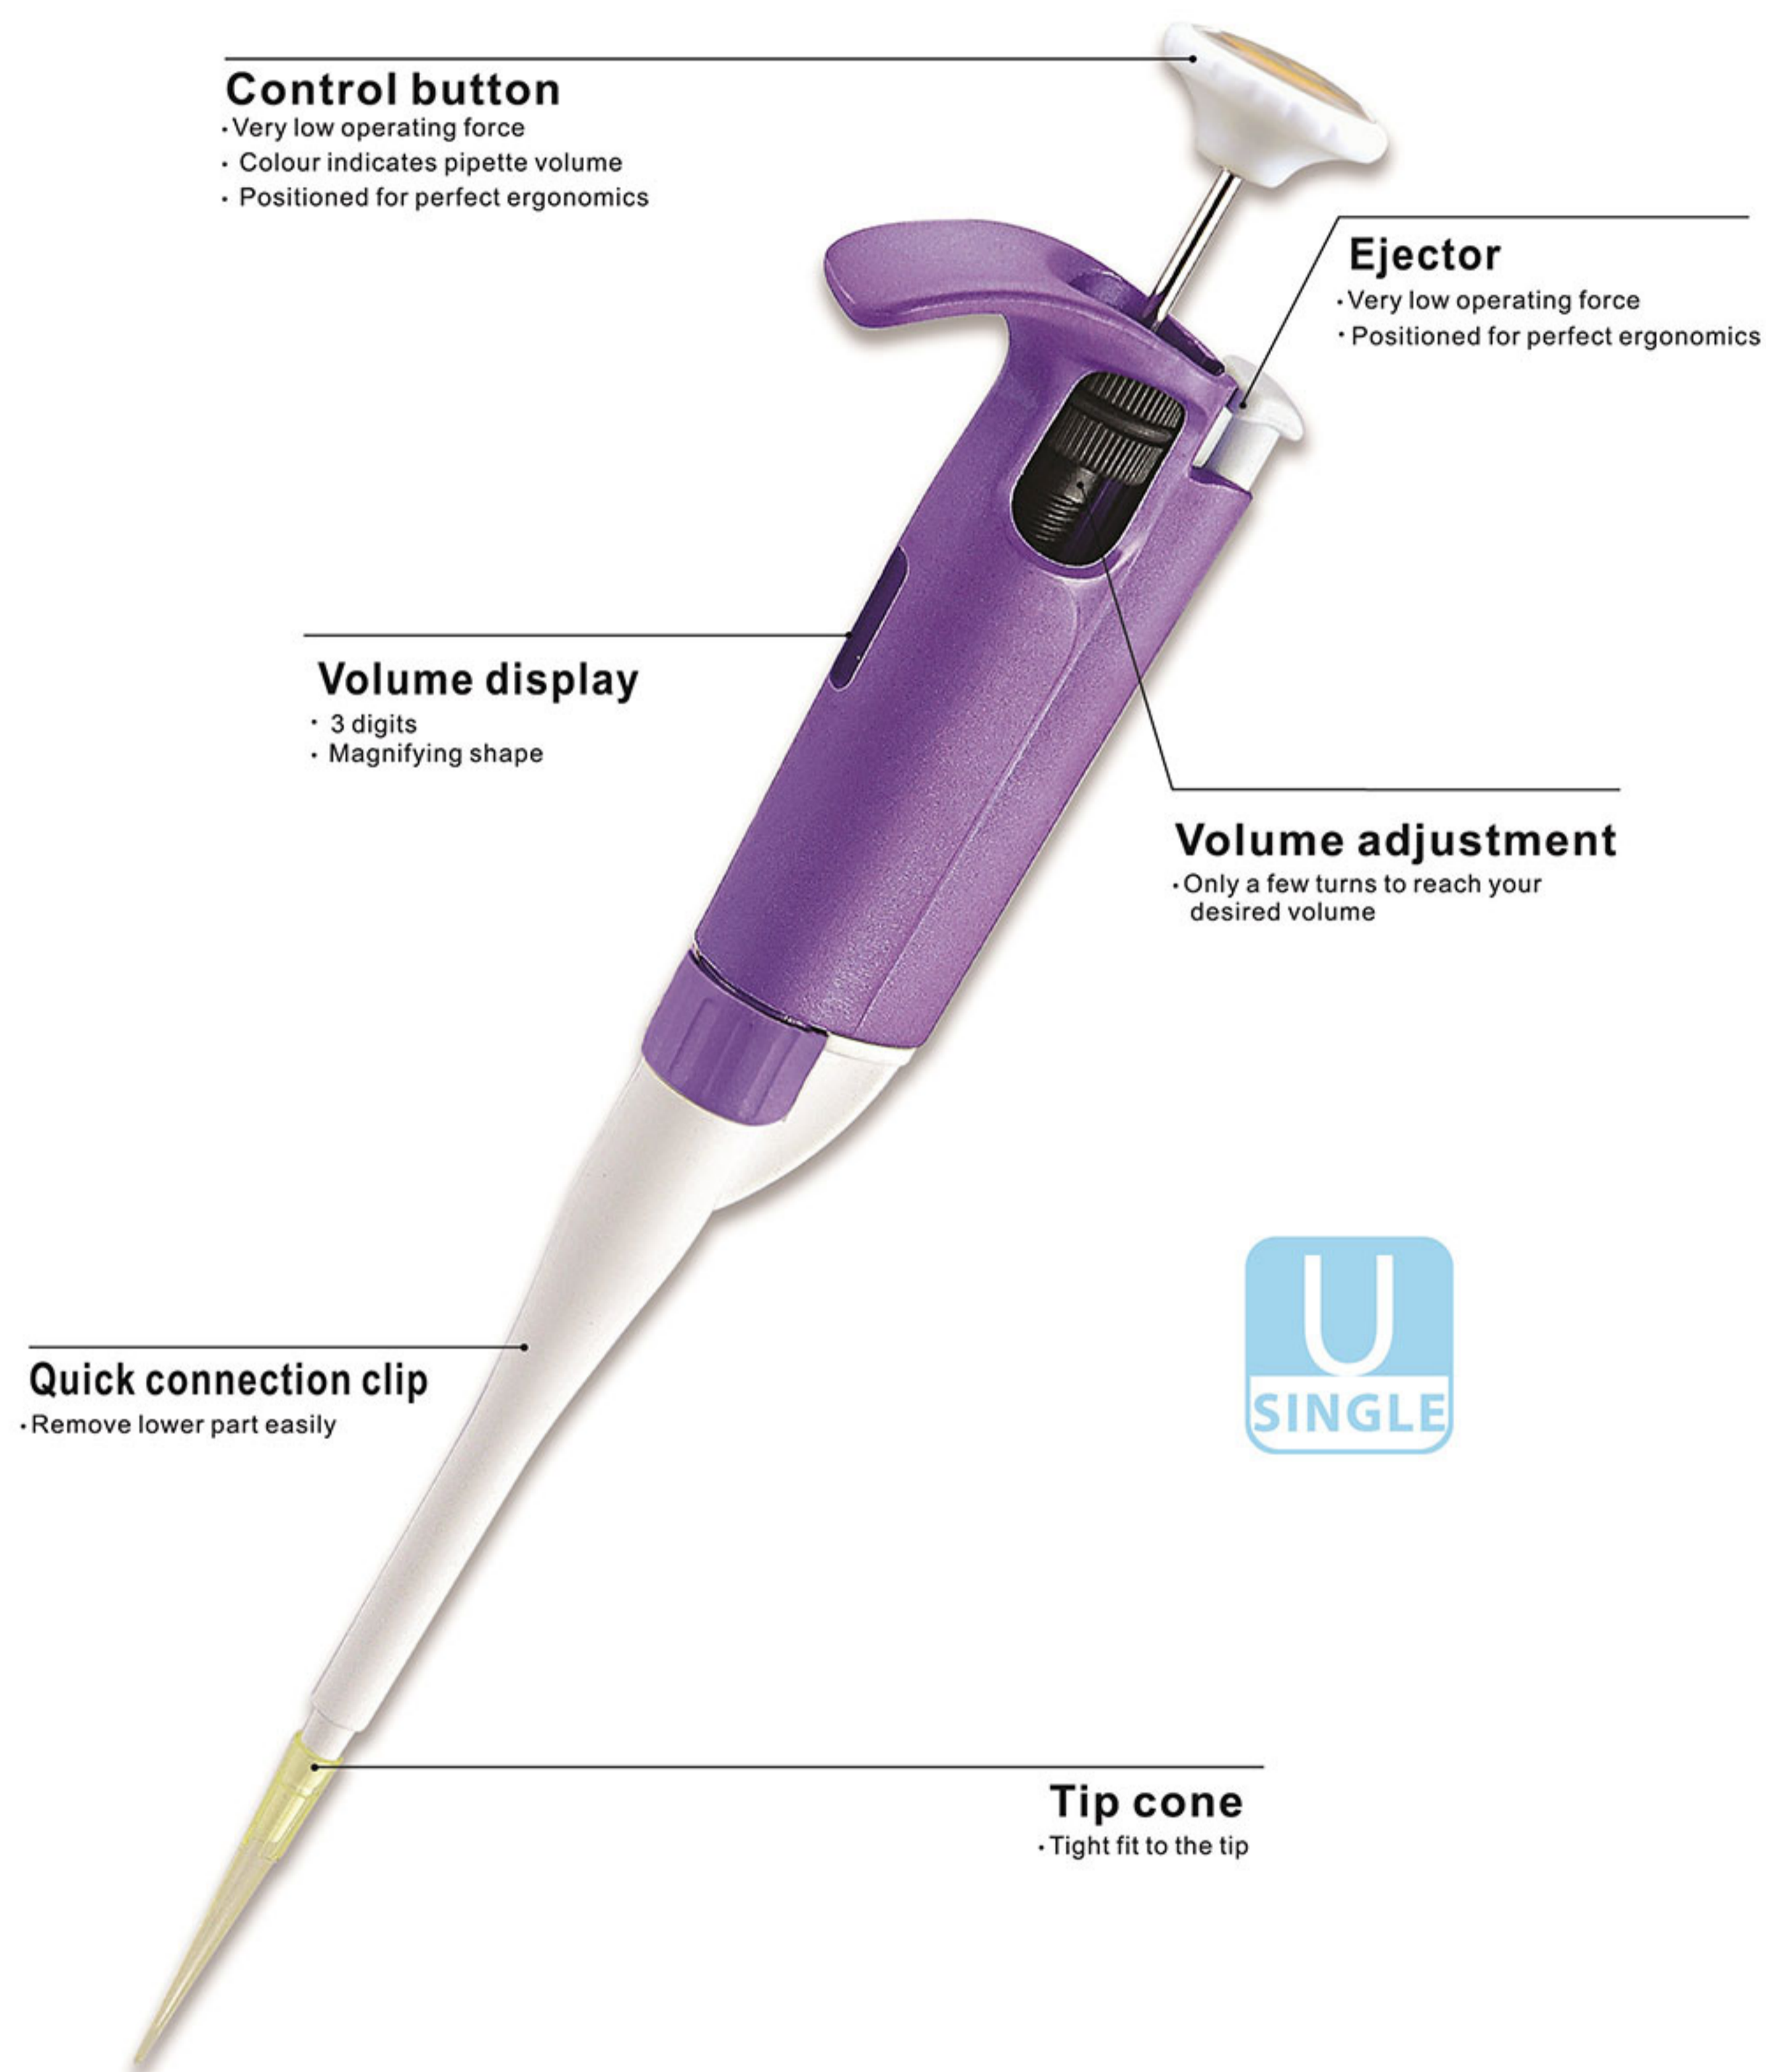

Description

HWLAB[®] pipette U model is designed and manufactured to provide you with a range of robust, accurate and precise pipettes. The HWLAB[®] pipette U model is a fully adjustable, air-displacement pipette with the selected volume shown on a digital indicator (volume display).

Product features

- 3 digits
- Magnifying shape
- Chemical resistance
- 121°C sterilization
- Very low operating force
- Colour indicates pipette volume
- Positioned for perfect ergonomics
- Only a few turns to reach your desired volume

Ordering information: HWLAB[®] Micropipette U Single channel, adjustable-volume

Cat.No	Model	Volume range	Accuracy	Repeatability
L-2081	U2	0.1-2 μ l	\pm 12.0-1.5%	\leq 6.00-0.70%
L-2082	U10	0.5-10 μ l	\pm 2.5-1.0%	\leq 1.50-0.40%
L-2083	U20	2-20 μ l	\pm 2.5-1.0%	\leq 1.50-0.30%
L-2084	U50	5-50 μ l	\pm 2.0-1.0%	\leq 1.50-0.25%
L-2085	U100	10-100 μ l	\pm 1.8-0.8%	\leq 0.50-0.15%
L-2086	U200	20-200 μ l	\pm 1.8-0.6%	\leq 0.50-0.15%
L-2087	U1000	100-1000 μ l	\pm 1.5-0.6%	\leq 0.30-0.15%
L-2088	U5000	500-5000 μ l	\pm 1.2-0.6%	\leq 0.30-0.15%
L-2089	U10ml	1-10ml	\pm 2.5-0.6%	\leq 0.30-0.15%

Remark

Quantity per carton: 20 pcs

G.W.: 7.0kg

Dimension: 43x31x27cm